


LSDP-32 PPR FIBERGLASS COMPOSITE DUAL PIPE LINE

Size Range: 16~32 mm
Line Speed: 30~40 m/min
Output: 550 kg/h




2021-05

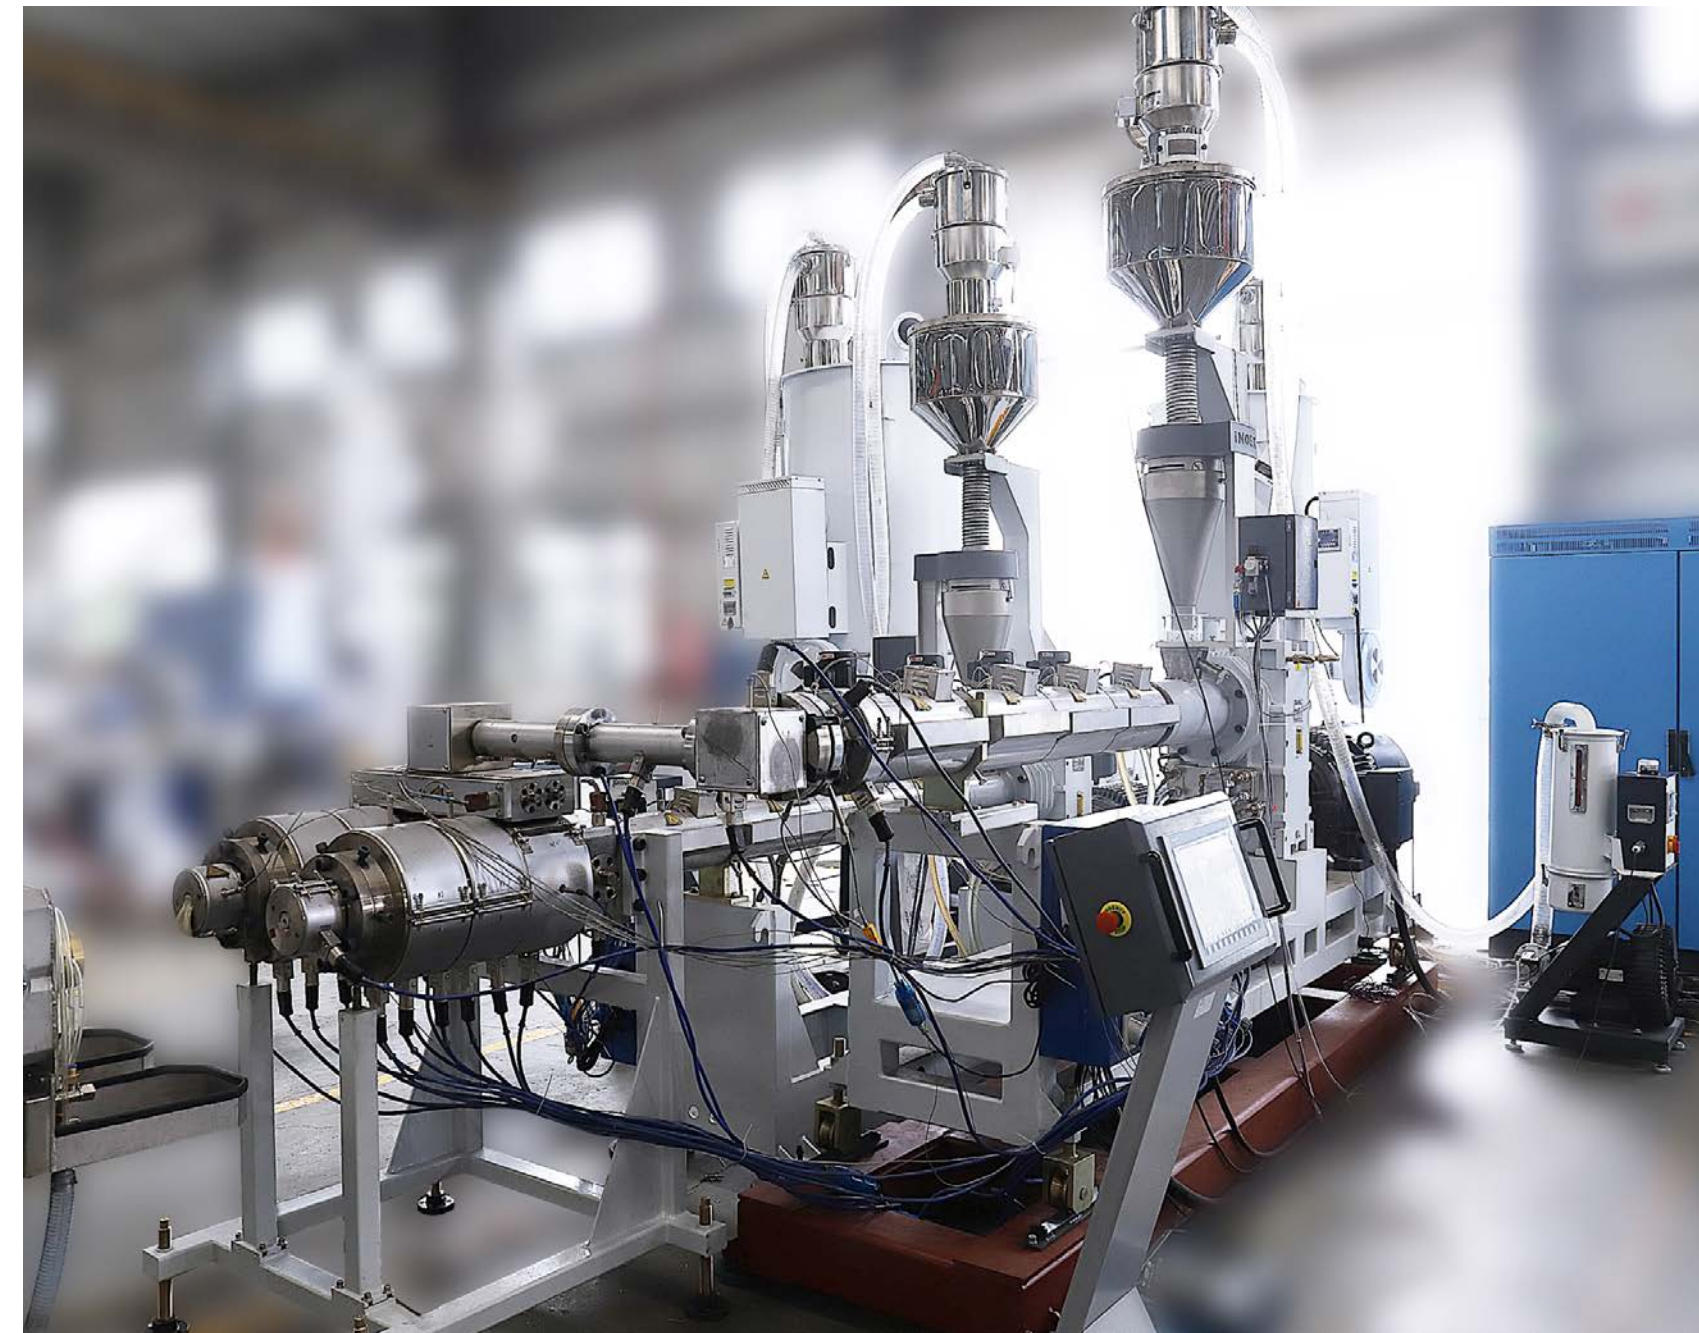

Main Extruder:

- Inner Layer & External Layer:
LSS-65-35 Single screw extruder
Output: ~350 kg/h
- Fiberglass layer:
LSS-65-34 Single screw extruder
Output: ~250 kg/h

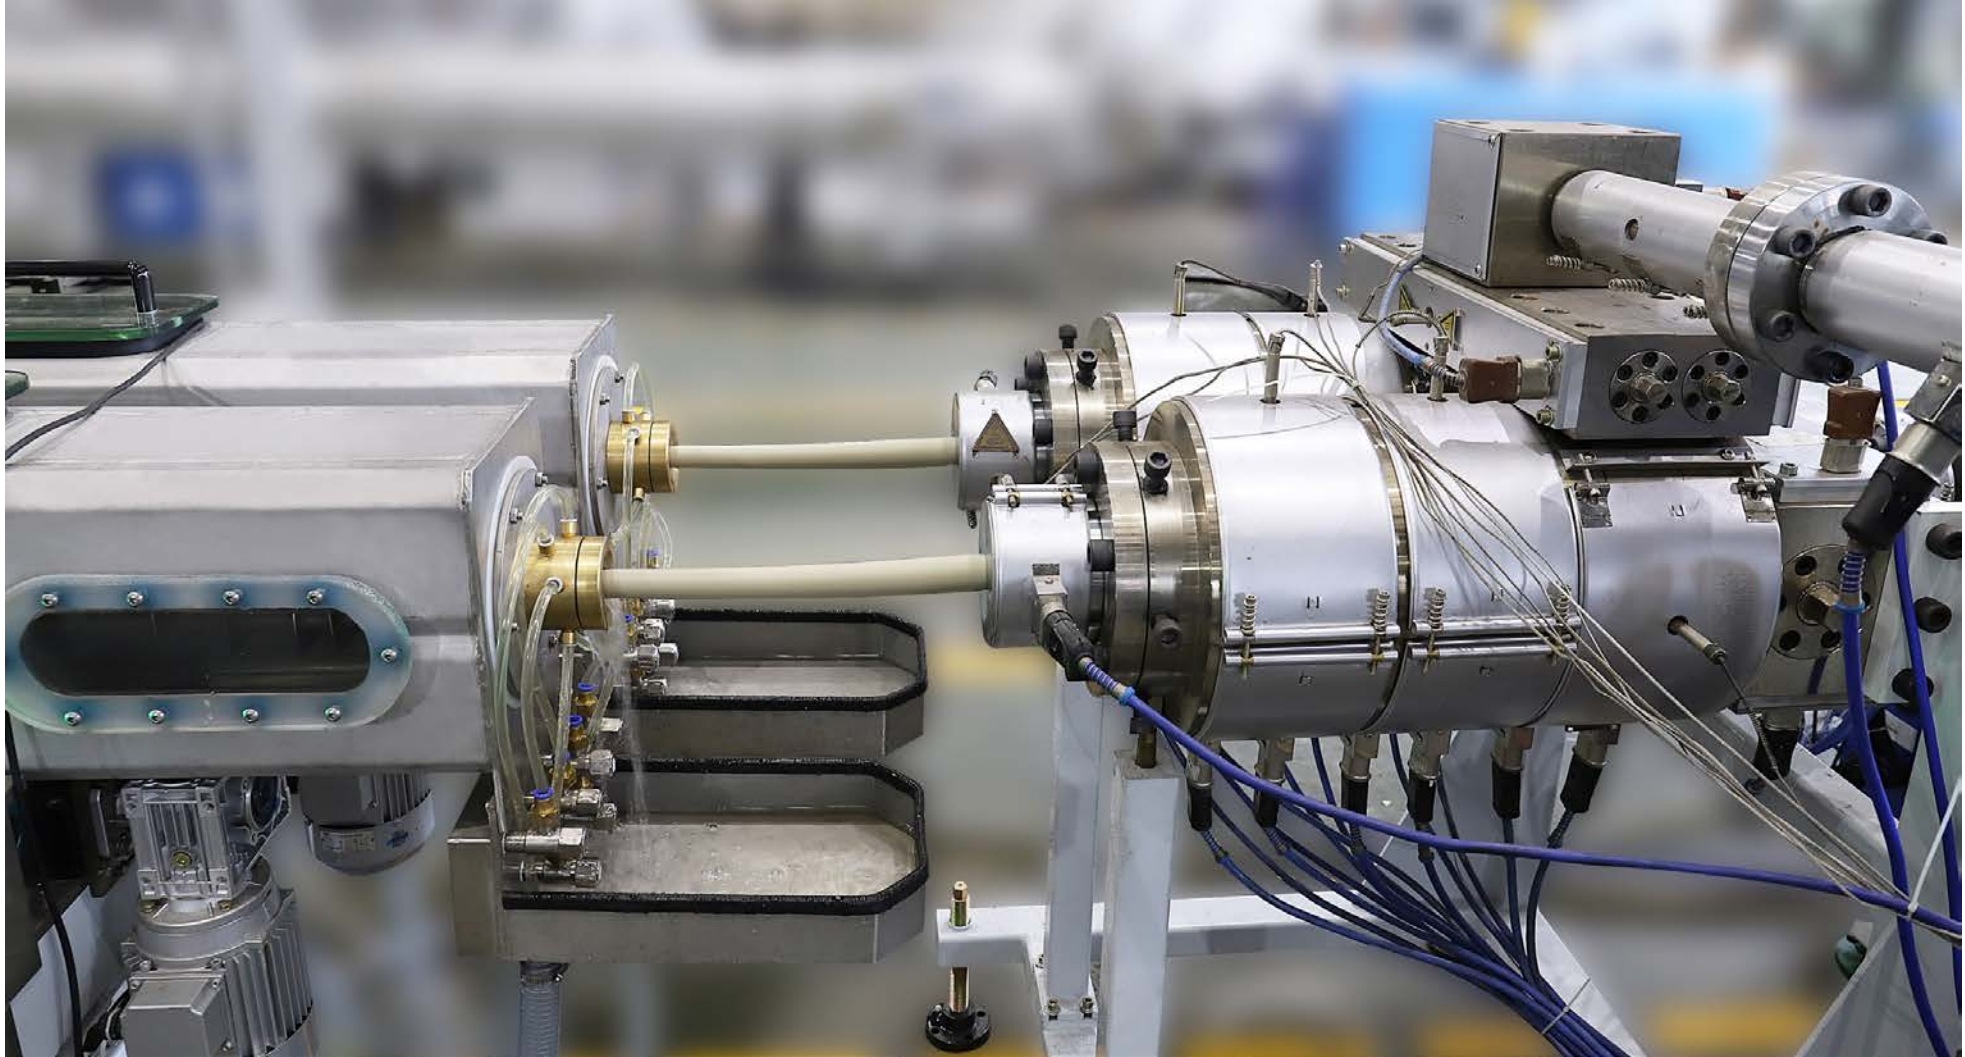

Three Layer ABA structure, Dual Pipe Head



Vacuum Tank: 9 Meters Dual Tank, with Inverter drive, close-loop control
Advantage: Automatic vacuum control, Energy Saving



Cooling Tank for dual pipe, 6 meters length x 3 sets





Haul off & Cutter Combo:

- Servo control, ensure good synchronization
- Fly cutter, perfect cutting wide speed range

